



ABRASION/MECHANICAL

Expando[®] TCP V0

Product Highlights

- Operating temperature
-50°C to +150°C
(-58°F to +302°F)
- 1 : 2 expansion ratio
- Self extinguishable
- EN 45545-2
- Zero halogen
- UL 94 V0 (raw material)
- Excellent abrasion resistance


Installation Features

- Flexible
- Bundling solution



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

EXPTCPV0_09122014

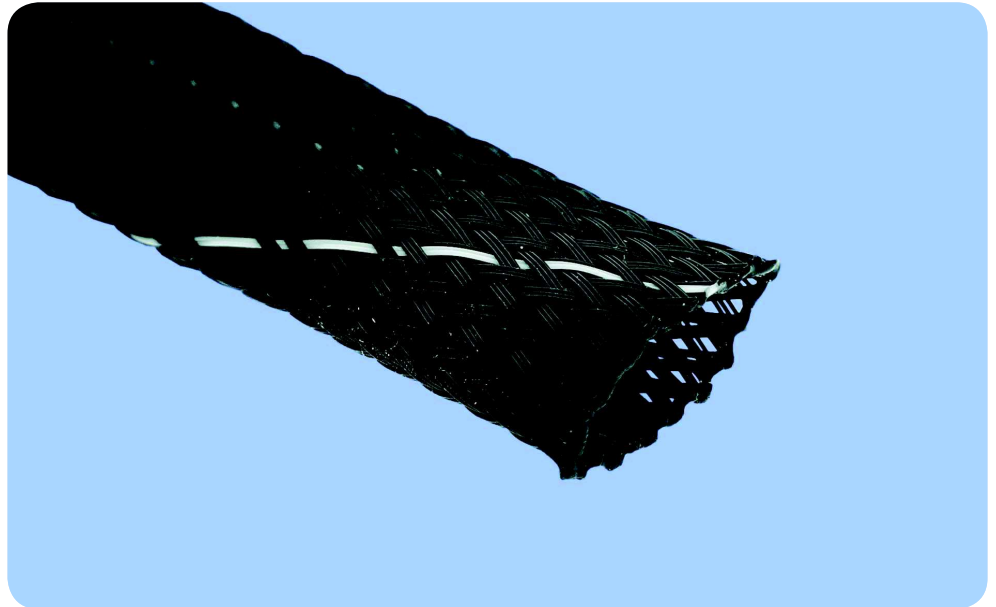

Expando[®] TCP V0 is an expandable braided sleeve manufactured from modified polyester monofilaments classified UL 94 V0 which are offering excellent flame-retardant properties. It is designed for the protection of tubing and the maintenance of wire and cable bundles.

This product has a highly expandable structure which allows for easy installation over long lengths even after the fitting of end connectors. Expando TCP V0 has an expansion ratio which enables a large number of diameters to be covered with a limited range of sizes.

The product is used in a wide range of industries including railway and electrical / electronic devices.

BentleyHarris[®]
Protection Products