



ABRASION/MECHANICAL

# ROUNDIT® 2000 FR

## Product Highlights

- Operating Temperature  
-50°C to +150°C  
(-58°C to +302°F)
- Self-wrapping design
- Flame resistant
- EN 45545-2
- Zero halogen
- Abrasion resistant
- Easy to apply and remove


## Installation Features

- Ideal for bundling without disconnecting components
- Accommodate break-outs
- Multifilament construction soft to the cables



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

RI2000FR\_07242014

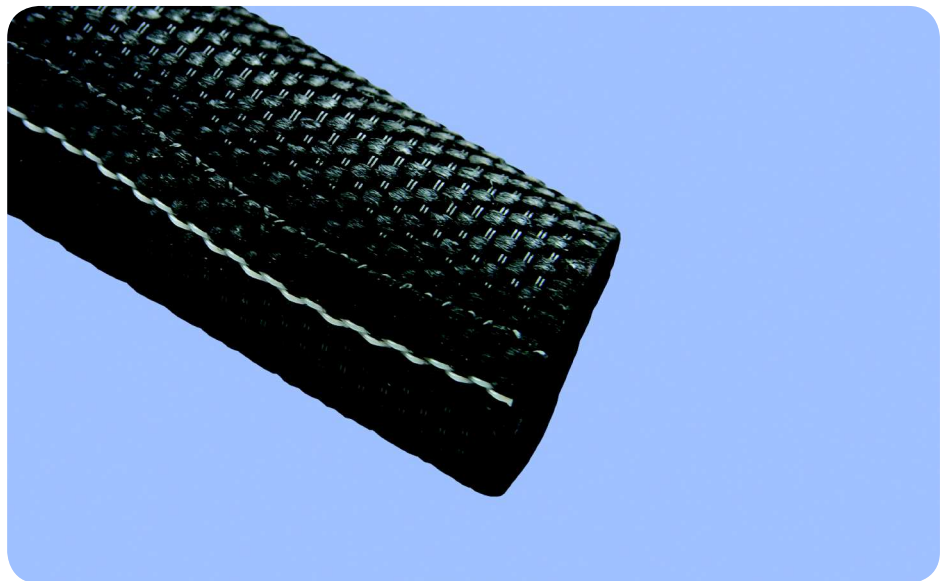

**ROUNDIT® 2000 FR** is a wrap-around sleeving manufactured from flame-retardant polyester monofilaments and multifilaments, designed for mechanical protection and maintenance of wire and cable bundles. Its construction with 100% covering ratio provides good abrasion resistance.

The self-wrapping feature of ROUNDIT 2000FR allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000FR may be applied and removed without any manipulation of connectors or fittings and offers an innovative solution in areas where breakouts are necessary.

ROUNDIT 2000FR has many applications in the marine, railway and electronic industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

**BentleyHarris®**  
Protection Products