




ABRASION/MECHANICAL

ROUNDIT® 2000 NX

Product Highlights

- Operating temperature from -60°C to +200°C (-76°F to +392°F)
- ASD EN 6049-006
- BMS 13-81 Type 1
- DMS2379 Class 4, Type 4
- FAR Part 25
- Halogen-free
- Self-wrapping design
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Tough fabric texture
- Oil and water repellent

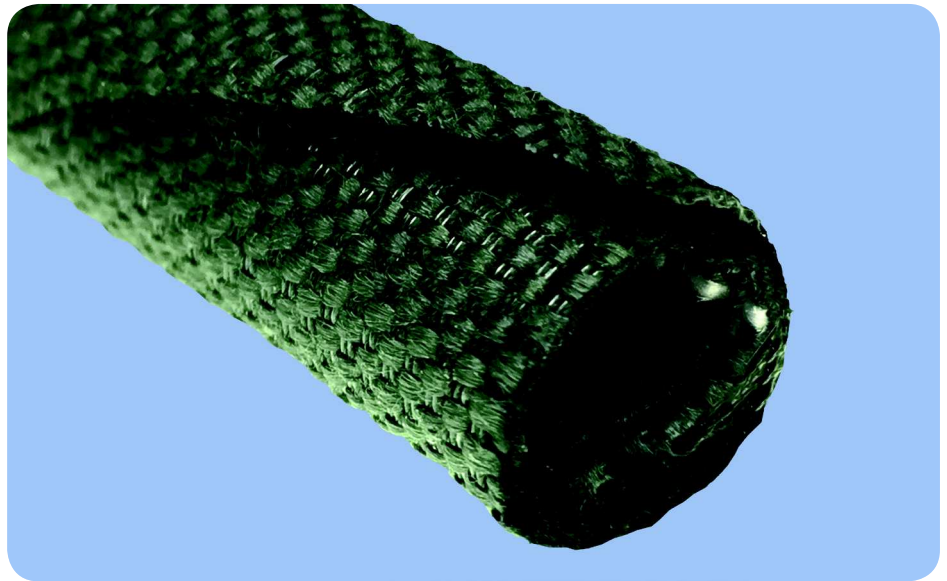

ROUNDIT® 2000 NX is a woven combination of Nomex® and PPS (polyphenylene sulfide). The Nomex/PPS blend in a flat weave construction gives ROUNDIT 2000 NX a rugged yet smooth texture and appearance for high temperature bundling and abrasion resistance. This product is rated to +200°C (+392°F) and is non-halogenated.

ROUNDIT 2000 NX is ideal for commercial and defense aircraft applications due to its excellent abrasion resistance and halogen-free qualities.

ROUNDIT® products are tough, lightweight oversleeves used to bundle and protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The self-wrapping feature of ROUNDIT products allows for quick and easy application and removal of the product for assembly and maintenance. The product may also be applied or removed without disturbing connectors or fittings.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

Nomex is a registered trademark of E.I. DuPont de Nemours.

ROHS
COMPLIANT

REACH
COMPLIANT

Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

RI2000NX_04242016

BentleyHarris®
Protection Products

**FEDERAL
MOGUL**
Systems Protection