



ABRASION/MECHANICAL

ROUNDIT® 2000 V0

Product Highlights

- Operating temperature from -50°C to +150°C (-58°F to +302°F)
- Self-extinguishing
- Halogen-free
- UL 94 V0 (Raw Material)
- Self-wrapping design
- EN 45545-2
- Easy to apply and remove
- Excellent abrasion resistance


Typical Applications

- Protection of electrical components, wires and cables
- Ideal for reworking components without disconnecting them



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

RI2000V0_07242014

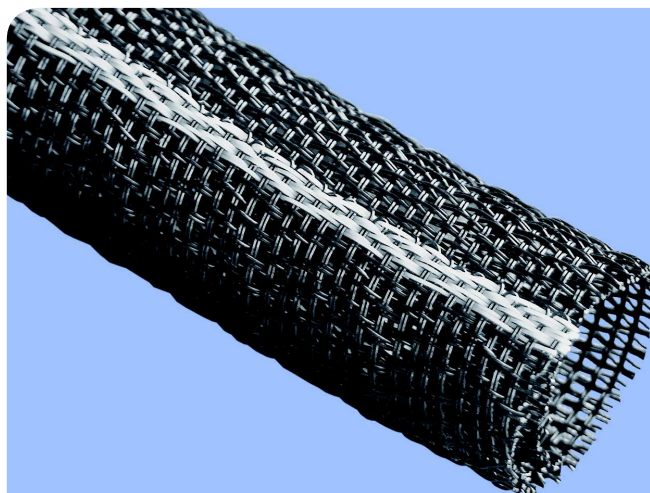

ROUNDIT® 2000 V0 is a wrappable sleeving manufactured from flame retardant polyester monofilaments. ROUNDIT 2000 V0 is designed for mechanical protection and maintenance of wire and cable bundles and has an excellent cut-through and abrasion resistance.

The self-wrapping feature of ROUNDIT 2000 V0 allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000 V0 may be installed or removed without any manipulation of connectors or fittings and is an ideal solution where breakouts are necessary. Its wrappable construction allows stocking of a limited range of sizes to cover a wide range of diameters.

ROUNDIT 2000 V0 has many applications in the railway, marine and electronic industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.