



ROUNDIT® V0 EMI


Product Highlights

- Operating temperature
-50°C to +200°C
(-58°F to +392°F)
- Self-wrapping design
- Fast and easy
installation for local
EMI protection
- Stable construction
- Ideal for reworking
components without
disconnecting them
- EN 45545-2
- Zero Halogen
- UL 94 V0 Raw material
- Cu/Ni metal
(ASTM B-355)
- Good level of EMI
shielding
R0 max = 6 mΩ and
Lt = 1.2 nH/m



Our manufacturing sites are
certified ISO 9001, ISO/TS 16949,
or AS/EN 9100, and ISO 14001

RIV0EMI_07242014

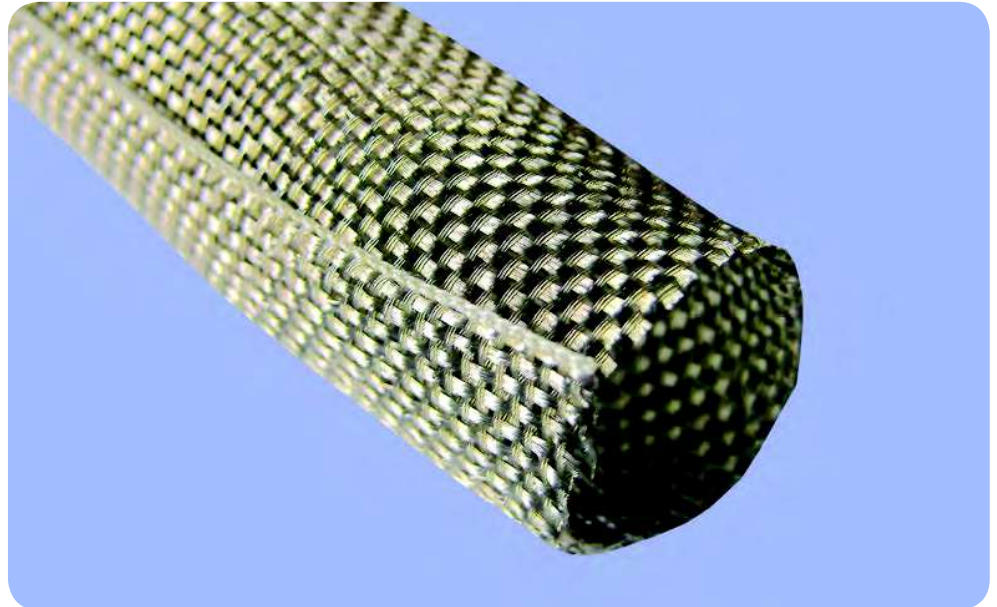

ROUNDIT® V0 EMI is a wrap-around sleeving designed for high performance EMI shielding of wire and cable bundles. ROUNDIT V0 EMI is manufactured from UL 94 V0 rated PPS monofilaments and nickel plated copper wires class 4 according to ASTM B-355.

The self-wrapping feature of ROUNDIT V0 EMI allows for quick and easy installation and removal of the product for assembly and maintenance.

The design offers innovative solutions to the protection of breakout areas and also provides ease of removal when inspection or maintenance of cables is necessary.

The stable construction guarantees the same level of EMI shielding regardless of the diameter on which it is installed within the recommended application range.

As an additional benefit, ROUNDIT V0 EMI enables users to stock a limited range of sizes to cover a wide range of cable and wire diameters.

ROUNDIT V0 EMI has many applications in the railway, marine and electronics industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products